## **SIEMENS**

Data sheet 3RW4036-1BB15



SIRIUS soft starter S2 45 A, 30 kW/500 V, 40  $^{\circ}\text{C}$  400-600 V AC, 110-230 V AC/DC Screw terminals

Figure similar

General technical data	General technical data				
product brand name		SIRIUS			
product feature					
<ul> <li>integrated bypass contact system</li> </ul>		Yes			
<ul><li>thyristors</li></ul>		Yes			
product function					
<ul> <li>intrinsic device protection</li> </ul>		Yes			
<ul> <li>motor overload protection</li> </ul>		Yes			
<ul> <li>evaluation of thermistor motor protection</li> </ul>		No			
<ul> <li>external reset</li> </ul>		Yes			
<ul> <li>adjustable current limitation</li> </ul>		Yes			
<ul> <li>inside-delta circuit</li> </ul>		No			
product component motor brake output		No			
insulation voltage rated value	V	600			
degree of pollution		3, acc. to IEC 60947-4-2			
reference code according to EN 61346-2		Q			
reference code according to DIN 40719 extended according to IEC 204-2 according to IEC 750		G			
Power Electronics					
product designation		Soft starter			
operational current					
<ul> <li>at 40 °C rated value</li> </ul>	Α	45			
<ul> <li>at 50 °C rated value</li> </ul>	Α	42			
<ul> <li>at 60 °C rated value</li> </ul>	Α	39			
yielded mechanical performance for 3-phase motors					
• at 400 V					
<ul> <li>at standard circuit at 40 °C rated value</li> </ul>	kW	22			
● at 500 V					
<ul> <li>— at standard circuit at 40 °C rated value</li> </ul>	kW	30			
operating frequency rated value	Hz	50 60			
relative negative tolerance of the operating frequency	%	-10			
relative positive tolerance of the operating frequency	%	10			
operating voltage at standard circuit rated value	V	400 600			
relative negative tolerance of the operating voltage at standard circuit	%	-15			
relative positive tolerance of the operating voltage at standard circuit	%	10			
minimum load [%]	%	20			
adjustable motor current for motor overload protection minimum rated value	А	23			
continuous operating current [% of le] at 40 °C	%	115			

The state of the s	<b>NA</b> /	0
power loss [W] at operational current at 40 °C during operation typical	W	6
Control circuit/ Control	_	
		40/00
type of voltage of the control supply voltage		AC/DC
control supply voltage frequency 1 rated value	Hz	50
control supply voltage frequency 2 rated value	Hz	60
relative negative tolerance of the control supply	%	-10
voltage frequency	0.4	40
relative positive tolerance of the control supply voltage frequency	%	10
control supply voltage 1 at AC at 50 Hz	V	110 230
, 0	-	
control supply voltage 1 at AC at 60 Hz	V	110 230
relative negative tolerance of the control supply voltage at AC at 50 Hz	%	-15
relative positive tolerance of the control supply	%	10
voltage at AC at 50 Hz relative negative tolerance of the control supply	%	-15
voltage at AC at 60 Hz	%	10
relative positive tolerance of the control supply voltage at AC at 60 Hz		10
control supply voltage 1 at DC	V	110 230
relative negative tolerance of the control supply	%	-15
voltage at DC relative positive tolerance of the control supply	%	10
voltage at DC		
display version for fault signal		red
Mechanical data		
size of engine control device		S2
width	mm	55
height	mm	160
depth	mm	170
fastening method		screw and snap-on mounting
mounting position		With additional fan: With vertical mounting surface +/-90°
		rotatable, with vertical mounting surface +/- 22.5° tiltable
		to the front and back Without additional fan: With vertical
		mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t
required spacing with side-by-side mounting		Surface 17- 10 t
upwards	mm	60
at the side	mm	30
downwards	mm	40
	mm	
wire length maximum	m	300
number of poles for main current circuit		3
Connections/ Terminals		
type of electrical connection		
for main current circuit		screw-type terminals
<ul><li>for main current circuit</li><li>for auxiliary and control circuit</li></ul>		screw-type terminals screw-type terminals
for main current circuit		**
<ul><li>for main current circuit</li><li>for auxiliary and control circuit</li></ul>		screw-type terminals
<ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>number of NC contacts for auxiliary contacts</li> </ul>		screw-type terminals 0
<ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>number of NC contacts for auxiliary contacts</li> <li>number of NO contacts for auxiliary contacts</li> <li>number of CO contacts for auxiliary contacts</li> <li>type of connectable conductor cross-sections for</li> </ul>		screw-type terminals 0 2
<ul> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>number of NC contacts for auxiliary contacts</li> <li>number of NO contacts for auxiliary contacts</li> <li>number of CO contacts for auxiliary contacts</li> <li>type of connectable conductor cross-sections for main contacts for box terminal using the front</li> </ul>		screw-type terminals 0 2
for main current circuit     for auxiliary and control circuit     number of NC contacts for auxiliary contacts     number of NO contacts for auxiliary contacts     number of CO contacts for auxiliary contacts     type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point		screw-type terminals 0 2 1
for main current circuit     for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point     solid		screw-type terminals 0 2 1 2x (1.5 16 mm²)
for main current circuit     for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point     solid     finely stranded with core end processing		screw-type terminals 0 2 1 2x (1.5 16 mm²) 0.75 25 mm²
for main current circuit     for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point     solid     finely stranded with core end processing     stranded		screw-type terminals 0 2 1 2x (1.5 16 mm²)
for main current circuit     for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point     solid     finely stranded with core end processing     stranded type of connectable conductor cross-sections for		screw-type terminals 0 2 1 2x (1.5 16 mm²) 0.75 25 mm²
for main current circuit     for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point     solid     finely stranded with core end processing     stranded type of connectable conductor cross-sections for main contacts for box terminal using the back		screw-type terminals 0 2 1 2x (1.5 16 mm²) 0.75 25 mm²
for main current circuit     for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point     solid     finely stranded with core end processing     stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point		screw-type terminals 0 2 1 2x (1.5 16 mm²) 0.75 25 mm² 0.75 35 mm²
for main current circuit     for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point     solid     finely stranded with core end processing     stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point     solid		screw-type terminals 0 2 1 2x (1.5 16 mm²) 0.75 25 mm² 0.75 35 mm²
for main current circuit     for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point     solid     finely stranded with core end processing     stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point     solid     finely stranded with core end processing     solid     finely stranded with core end processing		screw-type terminals 0 2 1 2x (1.5 16 mm²) 0.75 25 mm² 0.75 35 mm²  2x (1.5 16 mm²) 1.5 25 mm²
for main current circuit     for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point     solid     finely stranded with core end processing     stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point     solid     finely stranded with core end processing     stranded     stranded		screw-type terminals 0 2 1 2x (1.5 16 mm²) 0.75 25 mm² 0.75 35 mm²
for main current circuit     for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point     solid     finely stranded with core end processing     stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point     solid     finely stranded with core end processing     stranded type of connectable conductor cross-sections for solid     finely stranded with core end processing     stranded type of connectable conductor cross-sections for		screw-type terminals 0 2 1 2x (1.5 16 mm²) 0.75 25 mm² 0.75 35 mm²  2x (1.5 16 mm²) 1.5 25 mm²
for main current circuit     for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point     solid     finely stranded with core end processing     stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point     solid     finely stranded with core end processing     stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping		screw-type terminals 0 2 1 2x (1.5 16 mm²) 0.75 25 mm² 0.75 35 mm²  2x (1.5 16 mm²) 1.5 25 mm²
for main current circuit     for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point     solid     finely stranded with core end processing     stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point     solid     finely stranded with core end processing     stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points		screw-type terminals 0 2 1 2x (1.5 16 mm²) 0.75 25 mm² 0.75 35 mm²  2x (1.5 16 mm²) 1.5 25 mm² 1.5 35 mm²
for main current circuit     for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point     solid     finely stranded with core end processing     stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point     solid     finely stranded with core end processing     stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping		screw-type terminals 0 2 1 2x (1.5 16 mm²) 0.75 25 mm² 0.75 35 mm²  2x (1.5 16 mm²) 1.5 25 mm²

<ul><li>stranded</li></ul>		2x (1.5 25 mm²)
type of connectable conductor cross-sections at AWG cables for main contacts for box terminal		
<ul> <li>using the back clamping point</li> </ul>		16 2
<ul> <li>using the front clamping point</li> </ul>		18 2
<ul> <li>using both clamping points</li> </ul>		2x (16 2)
type of connectable conductor cross-sections for auxiliary contacts		
• solid		2x (0.5 2.5 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>		2x (0.5 1.5 mm²)
type of connectable conductor cross-sections at AWG cables		
<ul> <li>for auxiliary contacts</li> </ul>		2x (20 14)
<ul> <li>for auxiliary contacts finely stranded with core end processing</li> </ul>		2x (20 16)
Ambient conditions		
installation altitude at height above sea level	m	5 000
environmental category		
<ul> <li>during transport according to IEC 60721</li> </ul>		2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
during storage according to IEC 60721		1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
<ul> <li>during operation according to IEC 60721</li> </ul>		3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
ambient temperature		
<ul> <li>during operation</li> </ul>	°C	-25 +60
<ul> <li>during storage</li> </ul>	°C	-40 +80
derating temperature	°C	40
protection class IP on the front according to IEC 60529		IP20
touch protection on the front according to IEC 60529		finger-safe, for vertical contact from the front
Certificates/ approvals		
General Product Approval		EMC

Confirmation









Declaration of Conformity Test Certificates Marine / Shipping





Special Test Certificate

Type Test Certificates/Test Report





Marine / Shipping other Railway



<u>Confirmation</u> <u>Vibration and Shock</u>

Confirmation

UL/CSA ratings				
yielded mechanical performance [hp] for 3-phase AC motor				
• at 460/480 V				
<ul> <li>at standard circuit at 50 °C rated value</li> </ul>	hp	30		
● at 575/600 V				
<ul> <li>at standard circuit at 50 °C rated value</li> </ul>	hp	40		
contact rating of auxiliary contacts according to UL		B300 / R300		

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW4036-1BB15


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW4036-1BB15

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RW4036-1BB15

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax">http://www.automation.siemens.com/bilddb/cax</a> de.aspx?mlfb=3RW4036-1BB15&lang=en

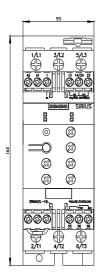

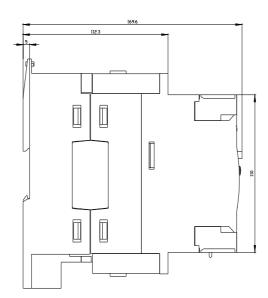



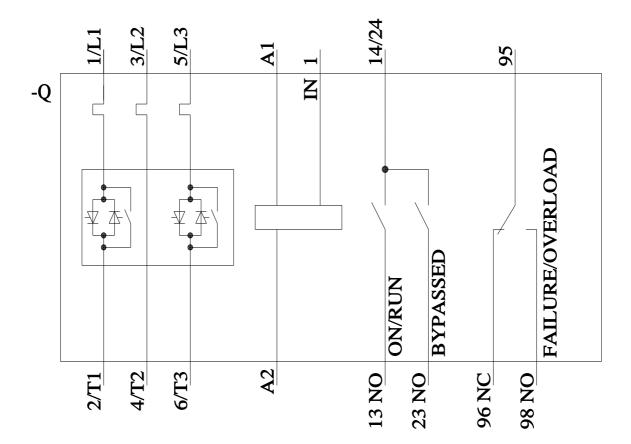

last modified: 1/16/2022 🖸