



Contactor, Size 14, 3-pole, AC-3, 335kW, 400/380 V (690 V) Auxiliary switch 44 (4NO+4NC) AC operation 200...240 V AC 50/60 Hz

product designation	Vacuum contactor
product type designation	3TF6
General technical data	
size of contactor	14
product extension	
• function module for communication	No
• auxiliary switch	No
insulation voltage	
• of main circuit with degree of pollution 3 rated value	1 000 V
• of auxiliary circuit with degree of pollution 3 rated value	690 V
surge voltage resistance	
• of main circuit rated value	8 kV
• of auxiliary circuit rated value	6 kV
maximum permissible voltage for safe isolation in networks with grounded star point	
• between auxiliary and auxiliary circuit	300 V
• between main and auxiliary circuit	500 V
shock resistance at rectangular impulse	
• at AC	8.1g / 5 ms, 4.7g / 10 ms
shock resistance with sine pulse	
• at AC	12.8g / 5 ms, 7.4g / 10 ms
mechanical service life (operating cycles)	
• of contactor typical	5 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	03/01/2017
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
• during operation	-25 ... +55 °C
• during storage	-55 ... +80 °C
relative humidity minimum	10 %
relative humidity during operation	10 ... 95 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
number of NC contacts for main contacts	0
type of voltage for main current circuit	AC
operating voltage	
• at AC-3 rated value maximum	690 V

<ul style="list-style-type: none"> ● at AC-3e rated value maximum 	690 V
operational current	
<ul style="list-style-type: none"> ● at AC-1 <ul style="list-style-type: none"> — up to 690 V at ambient temperature 40 °C rated value — up to 690 V at ambient temperature 55 °C rated value ● at AC-3 <ul style="list-style-type: none"> — at 400 V rated value — at 500 V rated value — at 690 V rated value ● at AC-3e <ul style="list-style-type: none"> — at 400 V rated value — at 500 V rated value — at 690 V rated value ● at AC-4 at 400 V rated value ● at AC-6a <ul style="list-style-type: none"> — up to 500 V for current peak value n=20 rated value — up to 690 V for current peak value n=20 rated value ● at AC-6a <ul style="list-style-type: none"> — up to 400 V for current peak value n=30 rated value — up to 500 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value 	700 A 630 A 630 A 630 A 630 A 630 A 630 A 610 A 513 A 513 A 342 A 342 A 342 A
connectable conductor cross-section in main circuit at AC-1	
<ul style="list-style-type: none"> ● at 40 °C minimum permissible 	480 mm ²
operational current for approx. 200000 operating cycles at AC-4	
<ul style="list-style-type: none"> ● at 400 V rated value ● at 690 V rated value 	300 A 300 A
operating power	
<ul style="list-style-type: none"> ● at AC-3 <ul style="list-style-type: none"> — at 230 V rated value — at 400 V rated value — at 690 V rated value ● at AC-3e <ul style="list-style-type: none"> — at 230 V rated value — at 400 V rated value — at 690 V rated value 	200 kW 335 kW 600 kW 200 kW 335 kW 600 kW
operating apparent power at AC-6a	
<ul style="list-style-type: none"> ● up to 400 V for current peak value n=20 rated value ● up to 690 V for current peak value n=20 rated value 	338 kVA 586 kVA
operating apparent power at AC-6a	
<ul style="list-style-type: none"> ● up to 400 V for current peak value n=30 rated value ● up to 690 V for current peak value n=30 rated value 	226 kVA 390 kVA
thermal short-time current limited to 10 s	5 040 A
power loss [W] at AC-3 at 400 V for rated value of the operational current per conductor	45 W
power loss [W] at AC-3e at 400 V for rated value of the operational current per conductor	45 W
no-load switching frequency at AC	2 000 1/h
operating frequency	
<ul style="list-style-type: none"> ● at AC-1 maximum ● at AC-3e <ul style="list-style-type: none"> — at 400 V maximum — at 690 V maximum ● at AC-2 at AC-3 maximum ● at AC-2 at AC-3e maximum 	700 1/h 500 1/h 500 1/h 200 1/h 200 1/h

Control circuit/ Control

type of voltage of the control supply voltage	AC
control supply voltage at AC	

<ul style="list-style-type: none"> • at 50 Hz rated value • at 60 Hz rated value 	200 ... 240 V
operating range factor control supply voltage rated value of magnet coil at AC	200 ... 240 V
<ul style="list-style-type: none"> • at 50 Hz • at 60 Hz 	0.8 ... 1.1
apparent pick-up power of magnet coil at AC	0.8 ... 1.1
<ul style="list-style-type: none"> • at 50 Hz • at 60 Hz 	1 200 VA
inductive power factor with closing power of the coil	1 200 VA
<ul style="list-style-type: none"> • at 50 Hz • at 60 Hz 	1
apparent holding power of magnet coil at AC	1
<ul style="list-style-type: none"> • at 50 Hz • at 60 Hz 	13.5 VA
inductive power factor with the holding power of the coil	13.5 VA
<ul style="list-style-type: none"> • at 50 Hz • at 60 Hz 	0.15
closing delay	0.15
<ul style="list-style-type: none"> • at AC 	70 ... 120 ms
opening delay	
<ul style="list-style-type: none"> • at AC 	70 ... 100 ms
arcing time	10 ... 15 ms
control version of the switch operating mechanism	Standard A1 - A2

Auxiliary circuit

number of NC contacts for auxiliary contacts	
<ul style="list-style-type: none"> • attachable • instantaneous contact 	4
number of NO contacts for auxiliary contacts	4
<ul style="list-style-type: none"> • attachable • instantaneous contact 	4
operational current at AC-12 maximum	10 A
operational current at AC-15	
<ul style="list-style-type: none"> • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value 	5.6 A
operational current at DC-12 at 440 V rated value	3.6 A
operational current at DC-12	2.5 A
<ul style="list-style-type: none"> • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value 	2.3 A
operational current at DC-13	0.33 A
<ul style="list-style-type: none"> • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value 	10 A
contact reliability of auxiliary contacts	10 A
	10 A
	3.2 A
	2.5 A
	0.9 A
	0.22 A
	10 A
	5 A
	1.14 A
	0.98 A
	0.48 A
	0.07 A
	one incorrect switching operation of 100 million switching operations (17 V, 5 mA)

UL/CSA ratings

full-load current (FLA) for 3-phase AC motor	
<ul style="list-style-type: none"> • at 480 V rated value • at 600 V rated value 	630 A
yielded mechanical performance [hp]	630 A
<ul style="list-style-type: none"> • for 3-phase AC motor <ul style="list-style-type: none"> — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value 	231 hp
	266 hp
	530 hp

— at 575/600 V rated value	664 hp
contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	
design of the fuse link	
<ul style="list-style-type: none"> • for short-circuit protection of the main circuit <ul style="list-style-type: none"> — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required 	gG: 1000 A (690 V, 100 kA) gG: 500 A (690 V, 100 kA), aM: 630 A (690 V, 50 kA), BS88: 500 A (415 V, 50 kA) fuse gG: 10 A
Installation/ mounting/ dimensions	
mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
fastening method	screw fixing
<ul style="list-style-type: none"> • side-by-side mounting 	Yes
height	276 mm
width	230 mm
depth	237 mm
required spacing	
<ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — forwards — upwards — downwards — at the side • for grounded parts <ul style="list-style-type: none"> — forwards — upwards — at the side — downwards • for live parts <ul style="list-style-type: none"> — forwards — upwards — downwards — at the side 	20 mm 10 mm 10 mm 10 mm 20 mm 10 mm 10 mm 10 mm 20 mm 10 mm 10 mm 10 mm
Connections/ Terminals	
type of electrical connection	
<ul style="list-style-type: none"> • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts 	Connection bar screw-type terminals Screw-type terminals
width of connection bar	30 mm
thickness of connection bar	6 mm
diameter of holes	11 mm
number of holes	1
type of connectable conductor cross-sections for main contacts	
<ul style="list-style-type: none"> • stranded • finely stranded with core end processing 	70 ... 240 mm ² 50 ... 240 mm ²
connectable conductor cross-section for main contacts	
<ul style="list-style-type: none"> • finely stranded with core end processing 	240 ... 50 mm ²
connectable conductor cross-section for auxiliary contacts	
<ul style="list-style-type: none"> • solid or stranded • finely stranded with core end processing 	0.5 ... 2.5 mm ² 0.5 ... 2.5 mm ²
type of connectable conductor cross-sections	
<ul style="list-style-type: none"> • for auxiliary contacts <ul style="list-style-type: none"> — solid — finely stranded with core end processing • at AWG cables for auxiliary contacts 	2x (0.5 ... 1.0 mm ²), 2x (1.0 ... 2.5 mm ²) 2x (0.5 ... 1.0 mm ²), 2x (0.75 ... 2.5 mm ²) 2x (18 ... 12)
AWG number as coded connectable conductor cross section	
<ul style="list-style-type: none"> • for main contacts • for auxiliary contacts 	500 18 ... 12
Safety related data	

product function

- mirror contact according to IEC 60947-4-1
- positively driven operation according to IEC 60947-5-1

protection class IP on the front according to IEC 60529

touch protection on the front according to IEC 60529

Yes; One NC contact each must be connected in series for the right and left auxiliary switch block respectively
 No
 IP00; IP20 with cover
 finger-safe, for vertical contact from the front with cover

Certificates/ approvals

General Product Approval	Functional Safety/Safety of Machinery	Declaration of Conformity
---------------------------------	--	----------------------------------



[Type Examination Certificate](#)



Declaration of Conformity	Test Certificates	Marine / Shipping
----------------------------------	--------------------------	--------------------------



EG-Konf.

[Miscellaneous](#)

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



Marine / Shipping	other
--------------------------	--------------



RMRS



DNV-GL

[Miscellaneous](#)

[Confirmation](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TF6844-0CM7>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TF6844-0CM7>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3TF6844-0CM7>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)





http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TF6844-0CM7&lang=en

Characteristic: Tripping characteristics, I_t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3TF6844-0CM7/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3TF6844-0CM7&objecttype=14&gridview=view1>

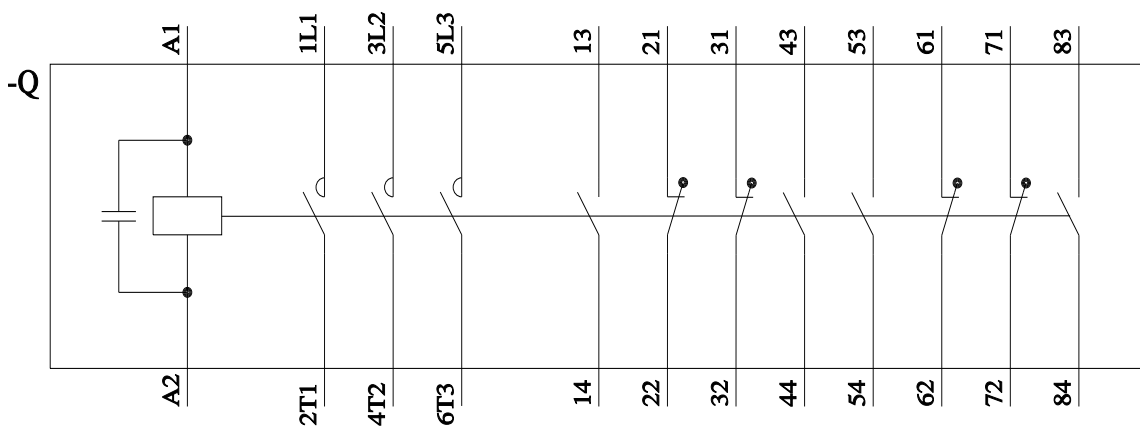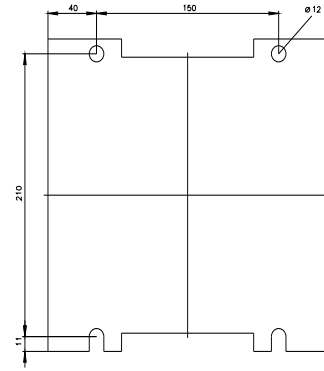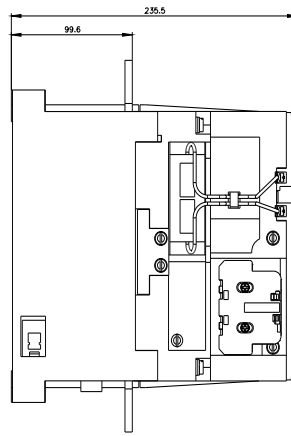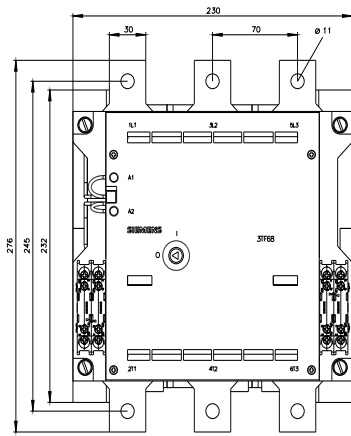

last modified:

8/2/2022

