



MASTER LEDtube EM/ Mains T8

MAS LEDtube 1200mm 18W830 T8 I

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance which cannot be distinguished from traditional fluorescent. For those that are looking for value for money within limited budget and re-lamping efforts for better light effect and lifetime.

Product data

General Information				
Cap-Base	G13 [Medium Bi-Pin Fluorescent]			
Main Application	Industrial			
Nominal Lifetime (Nom)	40000 h			
Switching Cycle	50000X			
B50L70	40000 h			
Light Technical				
Color Code	830 [CCT of 3000K]			
Beam Angle (Nom)	160 °			
Luminous Flux (Nom)	2000 lm			
Luminous Flux (Rated) (Nom)	2000 lm			
Rated Beam Angle	160 °			
Correlated Color Temperature (Nom)	3000 K			
Color Consistency	<6			
Color Rendering Index (Nom)	83			
LLMF At End Of Nominal Lifetime (Nom)	70 %			
Operating and Electrical				
Input Frequency	50 to 60 Hz			

Power (Rated) (Nom)	18 W			
Lamp Current (Nom)	78 mA			
Starting Time (Nom)	0.5 s			
Warm Up Time to 60% Light (Nom)	instant full light s			
Power Factor (Nom)	0.9			
Voltage (Nom)	220-240 V			
Temperature				
T-Ambient (Max)	45 °C			
T-Ambient (Min)	-20 °C			
T-Storage (Max)	65 °C			
T-Storage (Min)	-40 °C			
T-Case Maximum (Nom)	60 ℃			
Controls and Dimming				
Dimmable	No			
Mechanical and Housing				
Product Length	1200 mm			

Datasheet, 2019, May 7 data subject to change

MASTER LEDtube EM/Mains T8

A+		
Yes		
No		
CE marking RoHS compliance KEMA Keur		
certificate		
18 kWh		


Product Data	
Full product code	871869651116900

Order product name	MAS LEDtube 1200mm 18W830 T8 I			
EAN/UPC - Product	8718696511169			
Order code	929001178508			
Numerator - Quantity Per Pack	1			
Numerator - Packs per outer box	10			
Material Nr. (12NC)	929001178508			
Net Weight (Piece)	0.251 kg			

Warnings and Safety


• NOTES: The overall energy efficiency and light distribution of any installation that uses these lamps are determined by the design of the installation.

Dimensional drawing

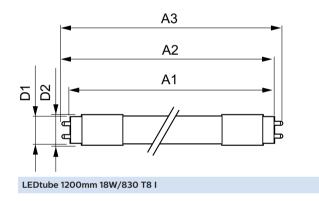


Product	D1	D2	A1	A2	А3
MAS LEDtube 1200mm	25.68 mm	28 mm	1198.0 mm	1205.0 mm	1212.0 mm
18W830 T8 I					

Photometric data



LEDtube 1200mm HO 18 W T8, 1200mm 18 W T8 I

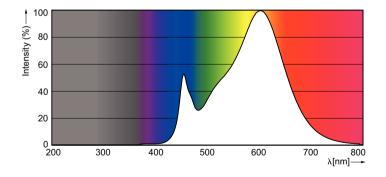

LEDtube 1200mm HO 18 W T8, 1200mm 18 W T8 I /830

MASTER LEDtube EM/Mains T8



© 2019 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.