


## PRODUCT-DETAILS

# 432BS6

## Surface inlet, 6h, 32A, IP44, 3P+N+E

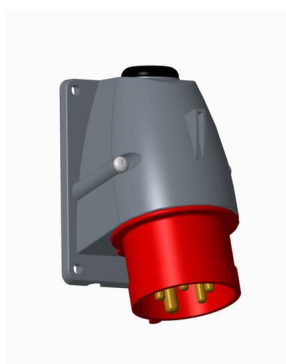

### Información General

|                       |                                                                                                                                                 |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Extended Product Type | 432BS6                                                                                                                                          |
| Product ID            | 2CMA193331R1000                                                                                                                                 |
| EAN                   | 7392696933315                                                                                                                                   |
| Catalog Description   | Surface inlet, 6h, 32A, IP44, 3P+N+E                                                                                                            |
| Long Description      | Wall mounted inlet, earthing sleeve position 6h, rated current 32A, IP44 splashproof, 3-poles+neutral+earth, frequency 50-60 Hz, color code Red |

### Clasificación

|                        |                     |
|------------------------|---------------------|
| E-Number (Sweden)      | E2417192            |
| E-Number (Finland)     | 2421524             |
| E-Number (Norway)      | 1542423             |
| EAN                    | 7392696933315       |
| Country of Origin      | Czech Republic (CZ) |
| Minimum Order Quantity | 10 piece            |

### Dimensiones

|                    |        |
|--------------------|--------|
| Product Net Width  | 85 mm  |
| Product Net Height | 116 mm |

|                            |                 |
|----------------------------|-----------------|
| Product Net Length         | 163 mm          |
| Product Net Depth / Length | 163 mm          |
| Product Net Weight         | 0.29 kg         |
| Mechanical Drawings        | 9AKK107680A3014 |

## Información de Embalaje

|                                |               |
|--------------------------------|---------------|
| Package Level 1 Width          | 188 mm        |
| Package Level 1 Depth / Length | 175 mm        |
| Package Level 1 Height         | 428 mm        |
| Package Level 1 Gross Weight   | 2.9 kg        |
| Package Level 1 EAN            | 7392696663311 |
| Package Level 1 Units          | box 10 piece  |
| Package Level 2 Units          | 240 piece     |

## Technical UL/CSA

|                          |            |
|--------------------------|------------|
| Ampere Rating UL/CSA     | 32 A       |
| Tightening Torque UL/CSA | 10.6 in·lb |

## Certificados y Declaraciones (Número de Documento)

|                                |                 |
|--------------------------------|-----------------|
| Declaration of Conformity - CE | 2CMC700005D0001 |
| Declaration                    | 2CMC700005D0001 |
| Environmental Information      | 2CMC000056M0000 |
| RoHS Information               | 2CMC700005D0001 |
| SEMKO Certificate              | 1510904         |
| REACH Declaration              | 2CMC700005D0001 |

## Información Adicional

|                        |                      |
|------------------------|----------------------|
| Additional Information | 3P+N+E               |
| Ambient Temperature    | -25 ... 40 °C        |
| Cable Cross-Section    | 2.5 ... 10 mm²       |
| Cable Diameter         | 22 mm                |
| Color                  | Red                  |
| Connection Type        | Screw                |
| Degree of Protection   | IP44                 |
| Design                 | Surface mounted plug |
| Frequency (f)          | 50 Hz<br>60 Hz       |
| Function               | Wall mounted inlet   |
| Housing Material       | Plastic (PA)         |
| Invoice Description    | Ind. P&S#432BS6      |

|                            |                                  |
|----------------------------|----------------------------------|
| Mounting Holes             | 91x67                            |
| Mounting Type              | Angled                           |
| Number of Poles            | 5                                |
| Order Multiple             | 10 piece                         |
| Product Main Type          | EBS                              |
| Product Name               | Wall mounted inlet               |
| Protection Type            | Splashproof                      |
| Rated Current ( $I_n$ )    | 32 A                             |
| Rated Frequency (f)        | 50...60 Hz                       |
| Rated Voltage ( $U_r$ )    | 200/346 ... 240/415 V            |
| Recommended Screw Driver   | PH2                              |
| RoHS Date                  | L23                              |
| Standards                  | IEC 60309-1, -2                  |
| Suitable For               | Surface Inlets                   |
| Suitable for Product Class | IEC Industrial Plugs and Sockets |
| Instructions and Manuals   | 2CMC700002D0001                  |
| RAL Number                 | RAL 7012 - Gris basalto          |

Clasificaciones

|        |          |
|--------|----------|
| eClass | 27440519 |
| UNSPSC | 39121406 |

Technical

|                   |               |
|-------------------|---------------|
| Wire Size         | 12 ... 10 AWG |
| Tightening Torque | 1.2 N·m       |

Categorias

Productos y sistemas de baja tensión → Tomas de corriente industriales → Easy & Safe → Surface Inlets

