



Contactor, Size 14, 3-pole, AC-3, 335kW, 400/380 V (690 V) Auxiliary switch 44 (4NO+4NC) AC operation 110...132 V AC 50/60 Hz

product designation
product type designation

Vacuum contactor
3TF6

General technical data

size of contactor	14
product extension	
• function module for communication	No
• auxiliary switch	No
insulation voltage	
• of main circuit with degree of pollution 3 rated value	1 000 V
• of auxiliary circuit with degree of pollution 3 rated value	690 V
surge voltage resistance	
• of main circuit rated value	8 kV
• of auxiliary circuit rated value	6 kV
maximum permissible voltage for safe isolation in networks with grounded star point	
• between auxiliary and auxiliary circuit	300 V
• between main and auxiliary circuit	500 V
shock resistance at rectangular impulse	
• at AC	8.1g / 5 ms, 4.7g / 10 ms
shock resistance with sine pulse	
• at AC	12.8g / 5 ms, 7.4g / 10 ms
mechanical service life (operating cycles)	
• of contactor typical	5 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	03/01/2017

Ambient conditions

installation altitude at height above sea level maximum	2 000 m
ambient temperature	
• during operation	-25 ... +55 °C
• during storage	-55 ... +80 °C
relative humidity minimum	10 %
relative humidity during operation	10 ... 95 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %

Main circuit

number of poles for main current circuit	3
number of NO contacts for main contacts	3
number of NC contacts for main contacts	0
type of voltage for main current circuit	AC
operating voltage	
• at AC-3 rated value maximum	690 V

• at AC-3e rated value maximum	690 V
operational current	
• at AC-1 — up to 690 V at ambient temperature 40 °C rated value — up to 690 V at ambient temperature 55 °C rated value • at AC-3 — at 400 V rated value — at 500 V rated value — at 690 V rated value • at AC-3e — at 400 V rated value — at 500 V rated value — at 690 V rated value • at AC-4 at 400 V rated value • at AC-6a — up to 500 V for current peak value n=20 rated value — up to 690 V for current peak value n=20 rated value • at AC-6a — up to 400 V for current peak value n=30 rated value — up to 500 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value	700 A 630 A 630 A 630 A 630 A 610 A 513 A 513 A 342 A 342 A 342 A
connectable conductor cross-section in main circuit at AC-1	
• at 40 °C minimum permissible	480 mm ²
operational current for approx. 200000 operating cycles at AC-4	
• at 400 V rated value • at 690 V rated value	300 A 300 A
operating power	
• at AC-3 — at 230 V rated value — at 400 V rated value — at 690 V rated value • at AC-3e — at 230 V rated value — at 400 V rated value — at 690 V rated value	200 kW 335 kW 600 kW 200 kW 335 kW 600 kW
operating apparent power at AC-6a	
• up to 400 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value	338 kVA 586 kVA
operating apparent power at AC-6a	
• up to 400 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value	226 kVA 390 kVA
thermal short-time current limited to 10 s	5 040 A
power loss [W] at AC-3 at 400 V for rated value of the operational current per conductor	45 W
power loss [W] at AC-3e at 400 V for rated value of the operational current per conductor	45 W
no-load switching frequency at AC	2 000 1/h
operating frequency	
• at AC-1 maximum • at AC-3e — at 400 V maximum — at 690 V maximum • at AC-2 at AC-3 maximum • at AC-2 at AC-3e maximum	700 1/h 500 1/h 500 1/h 200 1/h 200 1/h

Control circuit/ Control

type of voltage of the control supply voltage	AC
control supply voltage at AC	

• at 50 Hz rated value • at 60 Hz rated value	110 ... 132 V
operating range factor control supply voltage rated value of magnet coil at AC	110 ... 132 V
• at 50 Hz • at 60 Hz	0.8 ... 1.1
apparent pick-up power of magnet coil at AC	0.8 ... 1.1
• at 50 Hz • at 60 Hz	1 200 VA
inductive power factor with closing power of the coil	1 200 VA
• at 50 Hz • at 60 Hz	1
apparent holding power of magnet coil at AC	1
• at 50 Hz • at 60 Hz	13.5 VA
inductive power factor with the holding power of the coil	13.5 VA
• at 50 Hz • at 60 Hz	0.15
closing delay	0.15
• at AC	70 ... 120 ms
opening delay	
• at AC	70 ... 100 ms
arcing time	10 ... 15 ms
control version of the switch operating mechanism	Standard A1 - A2

Auxiliary circuit

number of NC contacts for auxiliary contacts	
• attachable • instantaneous contact	4
number of NO contacts for auxiliary contacts	4
• attachable • instantaneous contact	4
operational current at AC-12 maximum	4
operational current at AC-15	10 A
• at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value	5.6 A
operational current at DC-12 at 440 V rated value	3.6 A
operational current at DC-12	2.5 A
• at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value	2.3 A
operational current at DC-13	0.33 A
• at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value	10 A
contact reliability of auxiliary contacts	10 A
	5 A
	1.14 A
	0.98 A
	0.48 A
	0.07 A
	one incorrect switching operation of 100 million switching operations (17 V, 5 mA)

UL/CSA ratings

full-load current (FLA) for 3-phase AC motor	
• at 480 V rated value • at 600 V rated value	630 A
yielded mechanical performance [hp]	630 A
• for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value	231 hp
	266 hp
	530 hp

— at 575/600 V rated value		664 hp
contact rating of auxiliary contacts according to UL		A600 / Q600
Short-circuit protection		
design of the fuse link		
- for short-circuit protection of the main circuit - with type of coordination 1 required - with type of assignment 2 required - for short-circuit protection of the auxiliary switch required		gG: 1000 A (690 V, 100 kA) gG: 500 A (690 V, 100 kA), aM: 630 A (690 V, 50 kA), BS88: 500 A (415 V, 50 kA) fuse gG: 10 A
Installation/ mounting/ dimensions		
mounting position		with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
fastening method		screw fixing
side-by-side mounting		Yes
height		276 mm
width		230 mm
depth		237 mm
required spacing		
- with side-by-side mounting - forwards - upwards - downwards - at the side - for grounded parts - forwards - upwards - at the side - downwards - for live parts - forwards - upwards - downwards - at the side		20 mm 10 mm 10 mm 10 mm 20 mm 10 mm 10 mm 10 mm 20 mm 10 mm 10 mm 10 mm
Connections/ Terminals		
type of electrical connection		
- for main current circuit - for auxiliary and control circuit - at contactor for auxiliary contacts		Connection bar screw-type terminals Screw-type terminals
width of connection bar		30 mm
thickness of connection bar		6 mm
diameter of holes		11 mm
number of holes		1
type of connectable conductor cross-sections for main contacts		
- stranded - finely stranded with core end processing		70 ... 240 mm² 50 ... 240 mm²
connectable conductor cross-section for main contacts		
finely stranded with core end processing		240 ... 50 mm²
connectable conductor cross-section for auxiliary contacts		
- solid or stranded - finely stranded with core end processing		0.5 ... 2.5 mm² 0.5 ... 2.5 mm²
type of connectable conductor cross-sections		
- for auxiliary contacts - solid - finely stranded with core end processing - at AWG cables for auxiliary contacts		2x (0.5 ... 1.0 mm²), 2x (1.0 ... 2.5 mm²) 2x (0.5 ... 1.0 mm²), 2x (0.75 ... 2.5 mm²) 2x (18 ... 12)
AWG number as coded connectable conductor cross section		
- for main contacts - for auxiliary contacts		500 18 ... 12
Safety related data		

product function

- mirror contact according to IEC 60947-4-1
- positively driven operation according to IEC 60947-5-1

protection class IP on the front according to IEC 60529

touch protection on the front according to IEC 60529

Yes; One NC contact each must be connected in series for the right and left auxiliary switch block respectively
No

IP00; IP20 with cover

finger-safe, for vertical contact from the front with cover

Certificates/ approvals

General Product Approval

Functional
Safety/Safety of
Machinery

Declaration of
Conformity



[Type Examination
Certificate](#)



Declaration of
Conformity

Test Certificates

Marine / Shipping



EG-Konf.

[Special Test Certificate](#)

[Miscellaneous](#)

[Type Test Certificates/Test Report](#)



Marine / Shipping

other



[Confirmation](#)

[Miscellaneous](#)

[Confirmation](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TF6844-0CF7>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TF6844-0CF7>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3TF6844-0CF7>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TF6844-0CF7&lang=en

Characteristic: Tripping characteristics, I_t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3TF6844-0CF7/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3TF6844-0CF7&objecttype=14&gridview=view1>

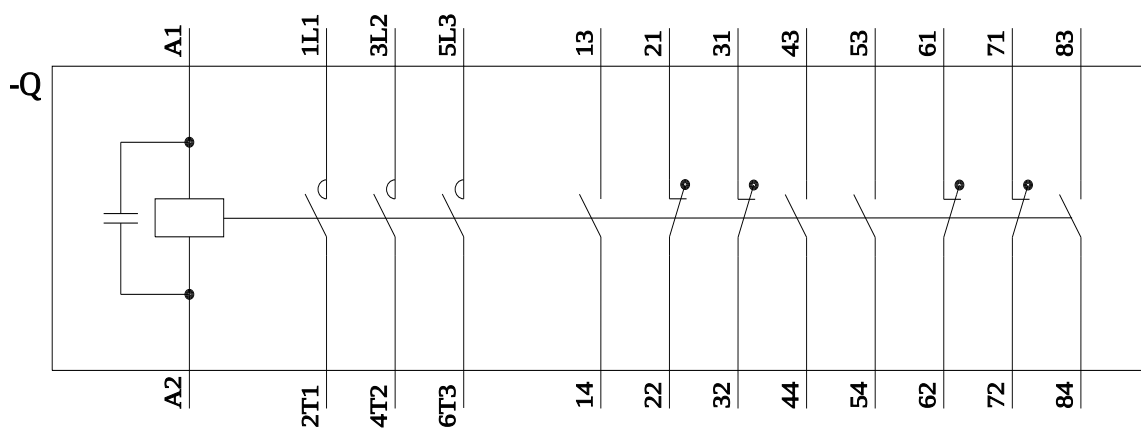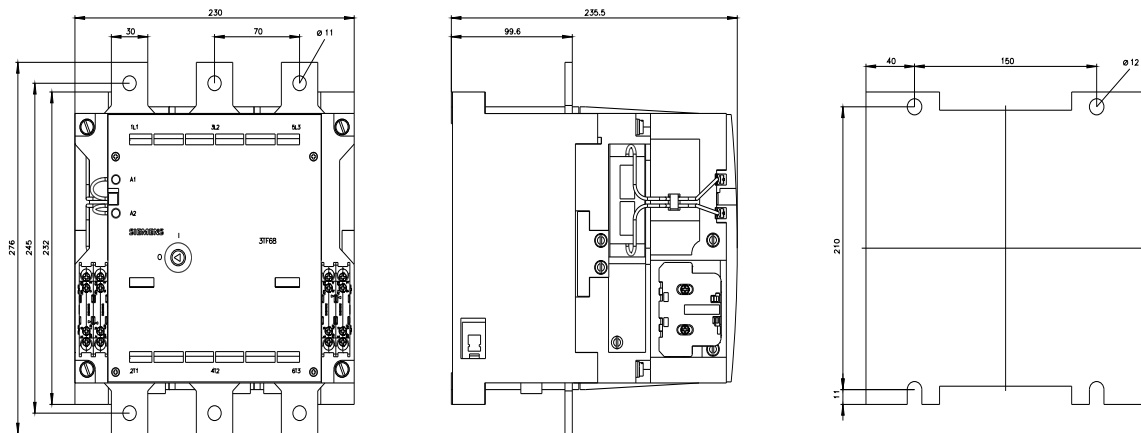

last modified:

8/2/2022

