


3-phase busbars Modular spacing 55 mm for 3 switches and accessories Fork shape connections

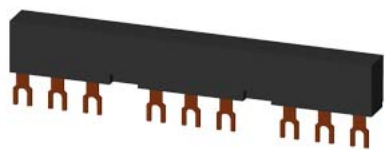

General technical data			
size of the circuit-breaker suitability for use protection class IP on the front according to IEC 60529 touch protection on the front according to IEC 60529		S00, S0 circuit-breakers 3RV2 IP20 finger-safe, for vertical contact from the front	
Installation/ mounting/ dimensions			
operational current rated value number of poles for main current circuit type of electrical connection for main current circuit	A	63 3 screw-type terminals	
Certificates/ approvals			
General Product Approval		Declaration of Conformity	Test Certificates
Confirmation		   	Special Test Certificate
UL			EG-Konf.
Test Certificates	Marine / Shipping		other
Type Test Certificates/Test Report	   	Confirmation	
ABS		PRS	RMRS
other	Environment		
	Environmental Confirmations		
VDE			

Further information	
Information on the packaging	
https://support.industry.siemens.com/cs/ww/en/view/109813875	
Information- and Downloadcenter (Catalogs, Brochures,...)	
https://www.siemens.com/ic10	
Industry Mall (Online ordering system)	

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV1915-2BB>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV1915-2BB>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV1915-2BB>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV1915-2BB&lang=en

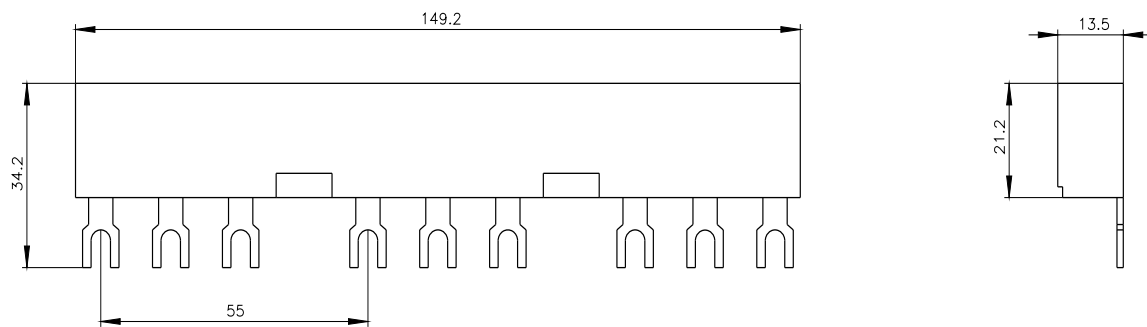

last modified:

2/9/2022 