


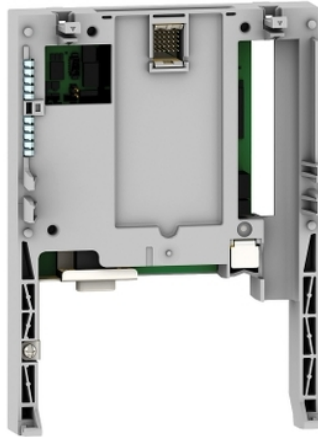

Main

Product or component type	Communication card
Range compatibility	Altivar 71 Altivar 61Q Altivar 61 Altivar 71Q
Communication port protocol	Profibus DP
Connector type	9-way female SUB-D connector
Transmission rate	1.5 Mbps 12 Mbps 9600 bps 3 Mbps 500 kbps 19.2 kbps 187.5 kbps 6 Mbps 93.75 kbps

Complementary

Number of addresses	1...126
Communication service	CiA 402 profile I/O profile I/O data Communication monitoring can be inhibited, adjustable PPO type 5
Display type	1 LED for DX (data exchange) 1 LED for ST (status) Graphic display terminal for control word received Graphic display terminal for I/O data Graphic display terminal for reference received
Product weight	0.3 kg

Offer Sustainability

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration

Contractual warranty

Warranty	18 months
----------	-----------