



MASTER VALUE LEDspot MV

LED 60W E27 WW 230V R63 36D DIM 1BC/4

Delivering a warm, halogen-like accent beam, MASTER VALUE LEDspot MV is a perfect for spot lighting. Thanks to its high CRI, it realizes more natural colors, enabling cozy and comfortable ambience for residential, hospitality and emphasize the beauty of merchandise in retail. These LEDspots have the familiar look and feel of glass spots, keeping the classic beauty of glass spots and adding the strong performance from LED technology. The dimming function enables to create the desired atmosphere and it works with broad selection of dimmers.

Product data

General Information	
Cap-Base	E27 [E27]
Nominal Lifetime (Nom)	15000 h
Switching Cycle	50000X
Technical Type	5.7-60W
Light Technical	
Color Code	827 [CCT of 2700K]
Beam Angle (Nom)	36 °
Luminous Flux (Nom)	345 lm
Luminous Flux (Rated) (Nom)	345 lm
Luminous Intensity (Nom)	600 cd
Color Designation	Warm White (WW)
Rated Beam Angle	36 °
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	60.53 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80

LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	345 lm
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	5.7 W
Lamp Current (Nom)	29 mA
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	1 s
Power Factor (Nom)	0.5
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	82 °C
Controls and Dimming	
Dimmable	Yes

MASTER VALUE LEDspot MV

Approval and Application	
Energy Efficiency Label (EEL)	A+
Energy Saving Product	Yes
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	6 kWh


Product Data	
Full product code	871829178541500
Order product name	LED 60W E27 WW 230V R63 36D DIM 1BC/4

EAN/UPC - Product	8718291785415
Order code	929001114430
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	929001114430
Net Weight (Piece)	0.065 kg

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights



Dimensional drawing



R63 CL 230V 6W-50W 36D 2700K E27 Dim

Product	D	C
LED 60W E27 WW 230V R63 36D DIM 1BC/4	63 mm	102 mm

Photometric data

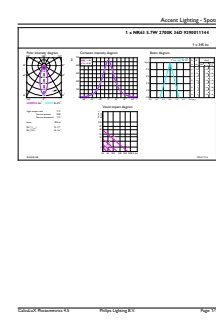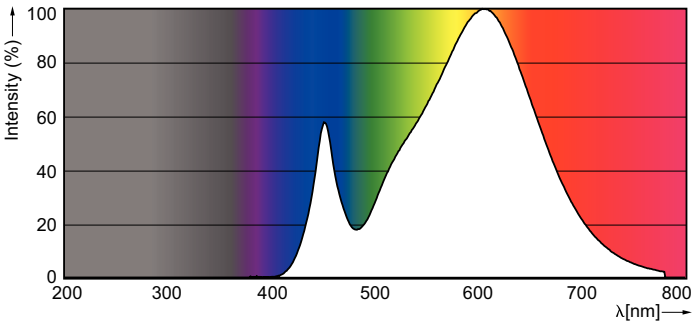

CorePro LEDspotMV D 5.7-60W R63

MASTER VALUE LEDspot MV

Photometric data

