

XVBL4M4

INDICATING BEACON 230VAC 10W +OPTIONS



Main

| | |
|------------------------------------|--|
| Range of product | Harmony XVB Universal |
| Product or component type | Complete beacon |
| Beacon or indicator bank unit type | Base unit direct or tube fixing Illuminated unit |
| Signalling type | Flashing |
| Mounting diameter | 70 mm |
| Component name | XVBL |
| Material | Glass reinforced polyamide: base unit Polycarbonate: illuminated unit |
| Light source | Bulb not included, red |
| Bulb type | Incandescent with BA 15d base Protected LED |
| [Us] rated supply voltage | 48...230 V AC |
| Maximum power dissipation in W | 7 W |

Complementary

| | |
|--|--|
| Connections - terminals | Screw clamp terminals, $\leq 1 \times 1.5 \text{ mm}^2$ with cable end |
| [Ui] rated insulation voltage | 250 V conforming to IEC 60947-1 |
| Nominal voltage limit | 0.85...1.1 U_n conforming to IEC 60947-5-1 |
| [Uimp] rated impulse withstand voltage | IEC 60947-1 4 kV |
| Flashing frequency | 1 Hz |
| CAD overall width | 70 mm |
| CAD overall height | 139 mm |
| CAD overall depth | 70 mm |
| Terminals description ISO n°1 | (COM-1)PW (GND)GROUND |
| Product weight | 0.28 kg |

Environment

| | |
|-------------------------------------|--|
| Pollution degree | 2 |
| Product certifications | UL 508 GOST CCC CSA C22-2 No 14 |
| Standards | EN/IEC 60947-5-1 |
| Protective treatment | TC |
| Ambient air temperature for storage | -40...70 °C |
| Electrical shock protection class | Class I on support tube conforming to IEC 61140 Class II on base unit conforming to IEC 61140 |
| IP degree of protection | IP65 on fixing base XVBZ0. conforming to IEC 60529 IP66 on base unit conforming to IEC 60529 |
| NEMA degree of protection | NEMA 4X conforming to UL 508 (indoor) |

Offer Sustainability


| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS Declaration |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | No need of specific recycling operations |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Illuminated Beacon for BA 15d Bulb or LED

Dimensions

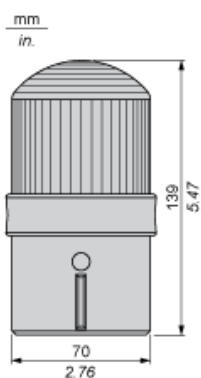

Illuminated Beacon

Wiring Diagram

