


Product data sheet

Specifications

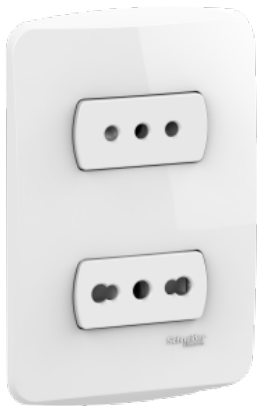

Italian socket outlet, Miluz, outlet 10A plus outlet 10/16A bipasso, 2P +E, white

S3B60490

Main

Range	Miluz
Product or component type	Socket-outlet Cover frame
Fixing mode	By screws

Complementary

Device presentation	Complete mechanism
Outlet standard description	With earthing contact
Outlet poles configuration	2P + E
Device mounting	Flush
Colour tint	White (RAL 9003)
Outlet standard	Italian
Type of packing	Flow-pack
[In] rated current	10.0 A
[Ue] rated operational voltage	250 V AC
Material	ASA + PC: centre plate Thermoplastic ABS-UV stabilised: cover frame PS (polystyrene): fixing frame PC (polycarbonate): casing
Surface finish	Glossy
Number of modules	2 modules
Connections - terminals	Screw-clamp terminals
Number of cables	2
Cable cross section	1.5...2.5 mm²
Wire stripping length	11 mm
AWG gauge	AWG 14 AWG 12
Height	115.0 mm
Width	77.0 mm
Depth	40.0 mm
Embedding depth	26.0 mm
Projecting depth	8.5 mm

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Environment

Standards	NCh 2027/1 NCh 2027/2
IP degree of protection	IP2x

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	83.712 g
Package 1 Height	3.42 cm
Package 1 width	9.5 cm
Package 1 Length	19.0 cm
Unit Type of Package 2	CAR
Number of Units in Package 2	20
Package 2 Weight	1.674 kg
Package 2 Height	21.5 cm
Package 2 width	15.8 cm
Package 2 Length	26.5 cm

Offer Sustainability

REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)