


GRP-Elbow 2 x 45°

pultruded, with unperforated side rail centre pieces, with connector tabs for connection as well as in the centre piece with upward open unperforated rung made of C-profile with approx. 17 mm slot width

ULBA 150.600

EAN Code: 4013339959181
Smallest packaging unit:1 pc.

the photorealistic images are to be considered as reference images

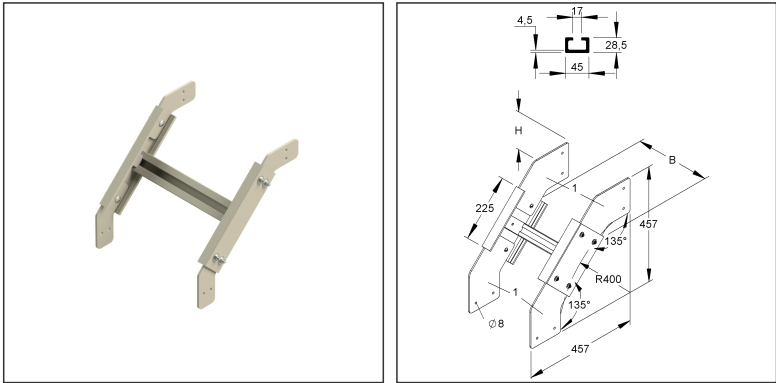

Article Description

GRP-elbow for UL, adjustable, 150x600 mm, with integrated connector, glass fiber reinforced polyester, pultruded, RAL 7032, pebble grey

Additional Price Information

Article group	N15
quantity unit	pcs.

Weight

Weight per quantity unit	4,500 kg/ pcs.
Weight in kg per 100	450 kg/ 100pcs.

Technical Datasheet

Cable Ladder System

ULBA 150.600

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	150.00 mm
Width	599 mm
Depth/length	500 mm

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	500 mm	Width	599 mm	Height	150.00 mm
Gross weight	4,5 kg	Volume	0,045 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

GRP elbow 2 x 45°, pultruded, with unperforated side rail centre pieces, with connector lugs for connection as well as in the centre piece with upwardly open unperforated rung made of C-profile with approx. 15 mm slot width, for producing 2 x 45° vertically falling cable ladder run, please order proportionate fixing accessories separately, halogen-free.

Please pay attention to the following during assembly:

- The fitting must be supported with outriggers at each cable ladder access point.
- If the width is > 400 mm, an additional middle support should be provided.
- To ensure proper installation, the connectors must be bolted with 4 FKM 6X20 E4 at each cable ladder access.

GRP elbow 2 x 45° with stainless steel connecting lugs (1) on request.

Used for: GRP cable ladder UL 150...

GRP cable ladder ULL 150...

Dimensions (approx. dimensions)

H x W : 150 x 600 mm

Outside dimensions : 457 mm

Radius R : 400 mm

Material : UP-GF (glass fibre reinforced polyester)

Material screws : stainless steel, material no. 1.4404, AISI 316L

Colour : pebble grey

RAL : 7032 (similar)

NIEDAX Model No. : ULBA 150.600

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	21.01.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	FR
Customs tariff number	39259020