

GRP-T-Piece



pultruded, with unperforated side rails, but with connecting holes as well as with unperforated rungs of C-profile open at the top with a slot width of approx. 17 mm

ULTE 150.600

EAN Code: 4013339959525

Smallest packaging unit:1 pc.

the photorealistic images are to be considered as reference images

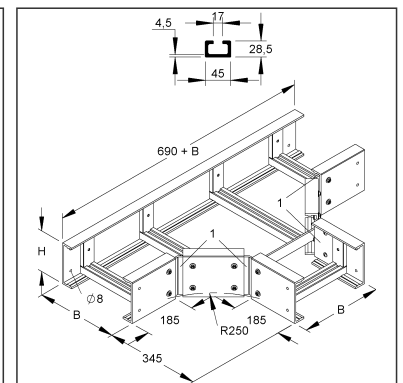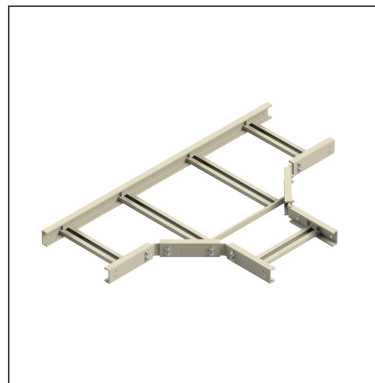

Article Description

GRP-T-piece for UL, 150x700 mm, with unperforated rungs, glass fiber reinforced polyester, pultruded, RAL 7032, pebble grey

Excl. Accessories

exclusive bolting	The ULGH 150/150 and ULIH 150 E4 splice plates are not included in the scope of delivery (please order separately).
-------------------	---

Additional Price Information

Article group	N15
quantity unit	pcs.

Weight

Weight per quantity unit	12 kg/ pcs.
Weight in kg per 100	1250 kg/ 100pcs.

Technical Datasheet

Cable Ladder System

ULTE 150.600

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	150.00 mm
Width	1290 mm
Depth/length	1290 mm

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	1290 mm	Width	1290 mm	Height	150.00 mm
Gross weight	12 kg	Volume	0,250 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

GRP T-piece, pultruded, with unperforated side rails but with connector holes as well as with unperforated rungs of C-profile open at the top with a slot width of approx. 17 mm, for the production of horizontal 90° T-outlets, please order proportionate fixing accessories separately, halogen-free.

Please pay attention to the following during installation:

- When connecting the shaped piece, a mounting distance of approx. 30 mm must be taken into account.
- The fitting must be supported with outriggers at each cable ladder access point.
- If the radius is > 250 mm and/or the width > 400 mm, an additional middle support should be provided.
- To ensure proper installation, the connectors must be bolted with 4 FKM 6X20 E4 at each cable ladder access.

GRP T-piece with stainless steel connecting lugs (1) on request.

GRP T-piece with unperforated rungs to realise radii R600 and R900 on request.

ULGH 150/150 and ULIH 150 E4 splice plates are not included (please order separately).

Used for: GRP cable ladder UL 150...

GRP cable ladder ULL 150...

Dimensions (approx. dimensions)

Height H x Width W : 150 x 600 mm

Length in main direction : 690 mm + B

Radius R : 250 mm

Material : UP-GF (glass fibre reinforced polyester)

Material of screws : stainless steel, material no. 1.4404, AISI 316L

Colour : pebble grey

RAL : 7032 (similar)

NIEDAX Model No. : ULTE 150.600

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	21.01.2025
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet

Cable Ladder System

ULTE 150.600

the photorealistic images are to be considered as reference images

Origin & International Trade

Country of origin	FR
Customs tariff number	39259020