


RS3 Cable Management Rack System

Siemon's RS3 series cable management rack system provides high capacity cable management for routing of both horizontal/backbone cabling and patch cords. Vertical channels with hinged cable manager covers conceal and route patch cables for a clean, professional installation.



Front covers fully conceal all vertical patch cord routing through an easy to use, modular design. Each section can be individually hinged in either direction to facilitate quick and easy changes. Covers include positive securing snap latches for trouble-free fastening

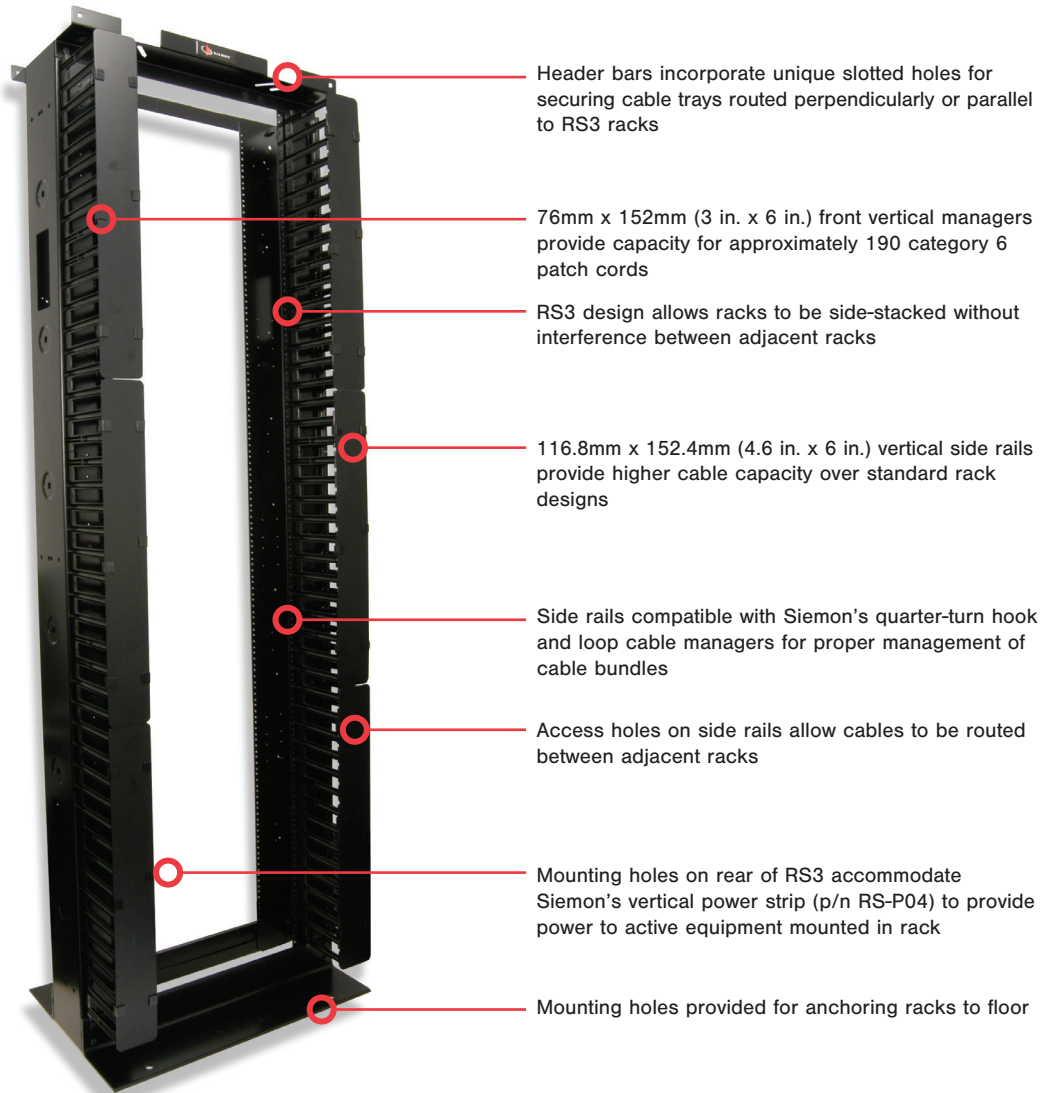

The individual managers on the vertical channels are rounded to allow patch cords to seamlessly enter and exit the managers without risk of cable deformation



Siemon's series horizontal cable managers provide a fully integrated appearance and hinging design for comprehensive management of patch cords

Product Information

RS3 Cable Management Rack System

Ordering Information

Part Number Description

RS3-07 2.1m x 0.48m (7 ft. x 19 in.) aluminum enhanced cable management rack system, 45U. Includes rack assembly hardware, vertical cable management channels with hinged covers, and ground lug
height: 2.1m (7 ft.)
width: 685.0mm (27 in.)
depth: 457.2mm (18 in.)

Add "-S" for steel.
*Note: Aluminum racks are intended for use with connecting hardware and cable managers only.
For mounting active equipment, steel racks are recommended.*
Note: 1U = 44.5mm (1.75 in.)



Rack Accessories

Ordering Information

Part Number Description

RS-P04 Power Strip, North American,
(10) 5-15R Receptacles, 5/15P Plug, 15A/120V, Resettable fuse, 1.2m (4ft.)
(includes mounting hardware)

RS-TRAY Rack top cable tray [includes roll of 9 black 457.2mm (18 in.) hook and loop
cable managers and 9 quarter-turn mounting clips]



RS-P04



RS-TRAY

RS3 SERIES RACK SPECIFICATIONS

U Space	45
Color	Black
Packaging	Ships unassembled in a carton
Standards Compliance	CEA-310-E, UL 1863, RoHS
Weight (w/packaging)	Aluminum: 35 kg (78 lbs) Steel: 60 kg (133 lbs)
Load Rating	Aluminum: 227 kg (500 lbs) Steel: 454 kg (1000 lbs)

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

North America P: (1) 860 945 4200	Asia Pacific P: (61) 2 8977 7500	Latin America P: (571) 657 1950/51/52	Europe P: (44) 0 1932 571771	China P: (86) 215385 0303	India Middle East P: (971) 4 3689743
---	--	---	--	-------------------------------------	--

Siemon Interconnect Solutions
P: (1) 860 945 4213
www.siemon.com/SIS